


ACR

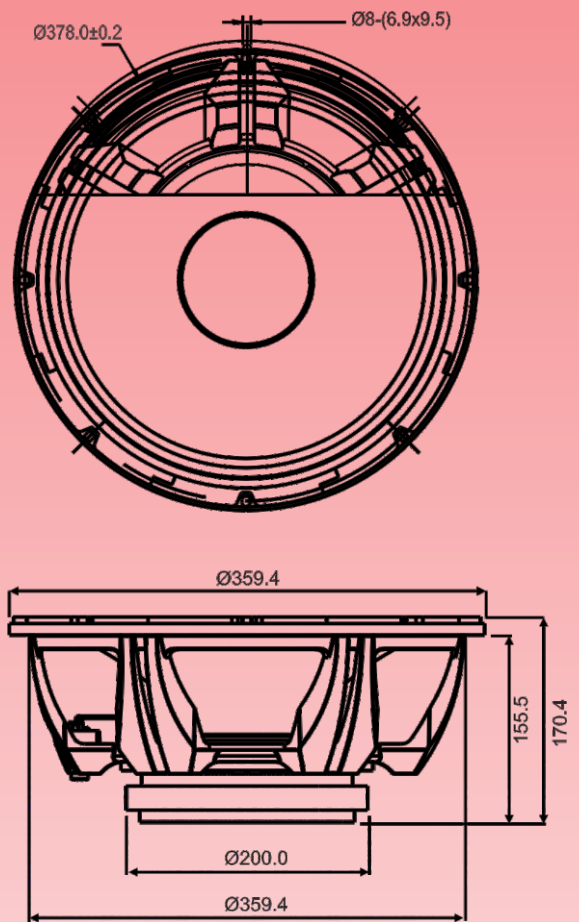

fabulous

15" PA-75155 W-Mk1

15 Inch Woofer - Fabulous series

Fitur:

1. Desain Chassis yang Istimewa

Chassis terbuat dari material *diecast* yang baik dan dilengkapi dengan desain khusus pada bagian bawah sebagai pemindah panas yang sangat baik.

2. Sistem motor rendah distorsi dan lebih tahan panas

spesial *coating* pada *voice coil* menambah ketahanan terhadap suhu tinggi dan desain motor khusus membuat distorsi speaker yang sangat rendah.

3. Output suara yang istimewa

Penambahan *coating inpack* dan *CLB* pada *conepaper* mampu memproduksi kualitas suara yang lebih baik.

Spesifikasi


Diameter Speaker	: 15 inch / 381 mm
Impedansi	: 8 Ω
Nominal Power Handling ¹	: 400 Watt
Program Power ²	: 800 Watt
Lebar Daerah Frekuensi	: 40 Hz - 4600 Hz
Sensitivity (2.83 V / 1 m)	: 100 dB
Diameter Cone Efektif	: 339 mm
Medan Magnet	: 1.31 T
Berat Magnet	: 2.46 kg/86.10 Oz
Material Magnet	: Ferrite
Diameter Voice Coil	: 75.55 mm/3 inch
Material Voice Coil	: TILL
Berat Speaker	: 8.7 kg

(¹) AES standard, test mode with continuous pink noise signal (6 dB crest factor; 2 hours) within the F_0 to $10F_0$ power calculated on rated nominal impedance. Loudspeaker in free air.
 (²) Power on continuous program is defined as 3dB greater than nominal power handling.


Parameter "Thiele-Small"

Frekuensi Resonansi / F_s	: 40 Hz
DCR	: 5.2 Ω
Q_{ts}	: 0.31
Q_{es}	: 0.32
Q_{ms}	: 11.11
M_{ms}	: 103.4 g
C_{ms}	: 0.14 mm/N
BL Product	: 21 Tm
V_{as}	: 162.5 liters
N_o	: 3.56%
S_d	: 907.9 cm ²
X_{max}	: 7.7 mm

Respon Frekuensi

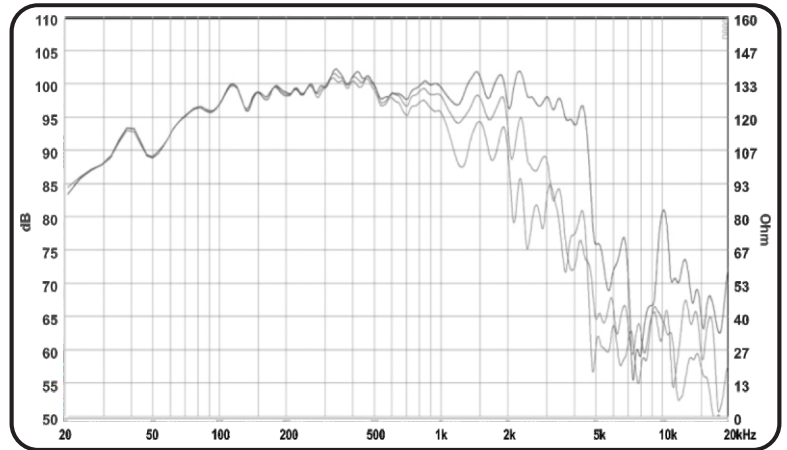

Impedansi

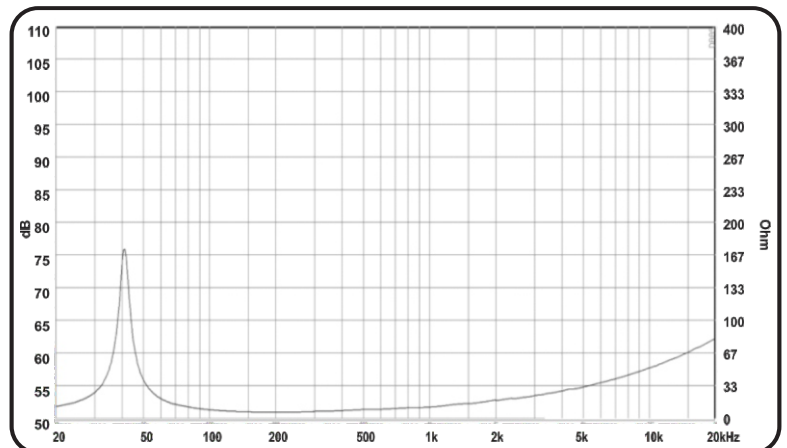



■ : on axis ■ : off axis 30° ■ : off axis 60°

- All data is taken using DAAS PRO in Chamber at distance 31.6 cm

Referensi Box Speaker

Dimensi Luar 126 Lt pada Fb 43 Hz, Tebal Material 18 mm

Respon Bass

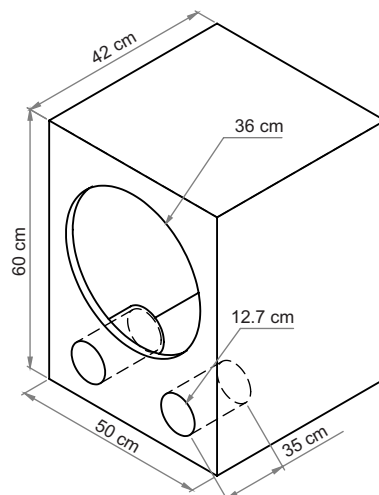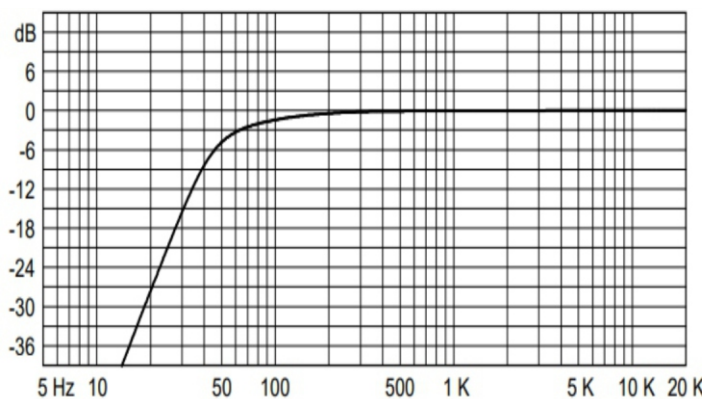

SHOWROOM

Surabaya : Jl. Genteng Besar No.15A, Genteng - Surabaya Telp. : +62 81 231833504 , +62 81 217334084

Jakarta : Ruko Glodok Plaza Blok F, No. 97, Mangga Besar - Jakarta Barat, +62-21 30525443, 6493139, Fax. : +62-21 6493171